

**YAVAPAI COUNTY FLOOD CONTROL DISTRICT  
REFERENCE MONUMENT RECORD**

SITUATED IN SECTION 30, TOWNSHIP 18 NORTH, RANGE 2 WEST  
GILA AND SALT RIVER MERIDIAN, YAVAPAI COUNTY, ARIZONA

**ERM 50-3**

DESCRIPTION: THE POINT IS A YAVAPAI COUNTY FLOOD CONTROL DISTRICT ALUMINUM CAP IN CONCRETE LOCATED AT THE NORTHWEST CORNER OF THE INTERSECTION OF BIG CHINO ROAD AND FEATHER MOUNTAIN ROAD..

**WGS84 POSITION**

LATITUDE: 34°54'40.16732"N  
LONGITUDE: 112°30'20.05364"W  
HEIGHT: 4295.9373 IFT

**NAD83/NAVD88 AZ SP POSITION**

NORTHING: 1423482.0290 IFT  
EASTING: 523448.3646 IFT  
ELEVATION: 4380.86(88) IFT  
SUPERSEDED: 4378.48(29) IFT

**NGS SOURCE POINT(4400)**

DESCRIPTION: THE POINT IS A 3" BRASS CAP ON AN IRON POST ALONG ABANDONED A.T.&S.F. RAILROAD GRADE ALONG THE EAST SIDE OF STATE ROUTE 89 0.10 MILES NORTH OF DEPOT 89 STORE.

**WGS84 POSITION**

LATITUDE: 34°53'00.86982"N  
LONGITUDE: 112°28'02.28752"W  
HEIGHT: 4324.7619 IFT

**NAD83/NAVD88 AZ SP POSITION**



NORTHING: 1413378.2630 IFT  
EASTING: 534866.0410 IFT  
ELEVATION: 4409.8600 IFT

**REFERENCE MARK NOTE**

THE MARK IS CLASSIFIED AS A STABILITY TYPE "C". IT MAY HOLD BUT OF A TYPE COMMONLY SUBJECT TO GROUND MOVEMENT.

USGS QUADRANGLE: PAULDEN

FIRM PANEL: 04025C0970 F PANEL NUMBER 970 OF 3925

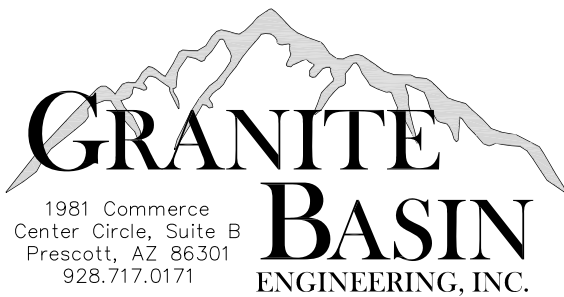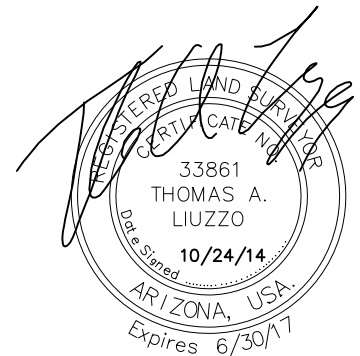

**YAVAPAI COUNTY FLOOD CONTROL DISTRICT  
REFERENCE MONUMENT RECORD  
ERM #50-3**

PREPARED FOR: YAVAPAI COUNTY FLOOD CONTROL DISTRICT 1120 COMMERCE DRIVE PRESCOTT, AZ 86305	GBE JOB #: 14096	BY: TL
	DATE: OCT 2014	SCALE: 1"=300'