

**YAVAPAI COUNTY FLOOD CONTROL DISTRICT
REFERENCE MONUMENT RECORD
SITUATED IN SECTION 5, TOWNSHIP 17 NORTH, RANGE 2 WEST
GILA AND SALT RIVER MERIDIAN, YAVAPAI COUNTY, ARIZONA**

ERM #308R
(REPLACES ERM #308)

DESCRIPTION: THE POINT IS A YAVAPAI COUNTY FLOOD CONTROL DISTRICT ALUMINUM CAP AND REBAR LOCATED ALONG THE SOUTH RIGHT OF WAY OF THE SANTA FE RAILROAD AND 1300 EAST OF FEATHER MOUNTAIN ROAD. IN PAULDEN, AZ. MONUMENT IS STAMPED "YCFCD BM 308R RLS 33861"

WGS84 POSITION

LATITUDE: 34°53'40.97589"N
LONGITUDE: 112°30'03.74558"W
HEIGHT: 4290.0735 IFT
NAD83/NAVD88 AZ SP POSITION

NORTHING: 1417490.102 IFT
EASTING: 524771.5441 IFT
ELEVATION: 4375.31(88) IFT
SUPERSEDED: BM 308

NGS SOURCE POINT(R 18)

DESCRIPTION: A STANDARD USGS BRASS CAP ON POST STAMPED 4400 1933. LOCATED ON A.T. AND S. F. RIGHT OF WAY, 0.1 MILES SOUTH OF PAULDEN STORE, 100 FEET NORTHWEST OF MILEPOST 31, 350 FEET NORTHWEST OF RAILROAD CULVERT NO. A-32, ON RIDGE, 50 FEET WEST OF RAILROAD CENTER-LINE

WGS84 POSITION

LATITUDE: 34°53'00.86982"N
LONGITUDE: 112°28'02.28752"W
HEIGHT: 4324.833 IFT

NAD83/NAVD88 AZ SP POSITION

NORTHING: 1413378.263 IFT
EASTING: 534866.041 IFT
ELEVATION: 4409.870(88) IFT




REFERENCE MARK NOTE

THE MARK IS CLASSIFIED AS A STABILITY TYPE "C". MAY HOLD BUT OF A TYPE COMMONLY SUBJECT TO GROUND MOVEMENT.

USGS QUADRANGLE: WINEGLASS RANCH

FIRM PANEL: 04025C0970G
PANEL NUMBER 970 OF 3900

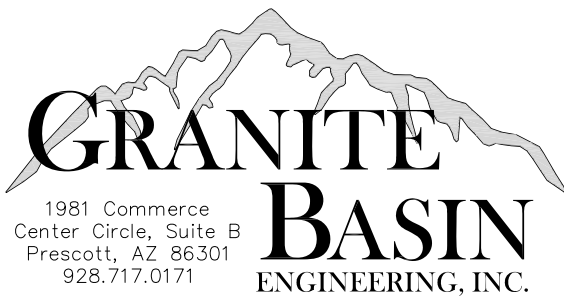

**YAVAPAI COUNTY FLOOD CONTROL
DISTRICT
REFERENCE MONUMENT RECORD
ERM #308R**

| | | |
|---|---------------------|----------------|
| PREPARED FOR: YAVAPAI COUNTY FLOOD CONTROL DISTRICT 1120 COMMERCE DRIVE PRESCOTT, AZ 86305 | GBE JOB #: 17106-02 | BY: DJP |
| | DATE: JULY 2018 | SCALE: 1"=150' |