•	'AS BUILT" ELEVATIONS FOR EITHER MANUFACTURED HOMES OR SITE BUILT HOMES					
	When Completed Return To: Yavapai County Flood Control District					

	Section 1 - Complete entire section					
	DATE <u>SEPT.</u> 5, 1997 ASSESSORS NUMBER <u>404-13-344</u> SUBDIVISION NAME AND LOT NUMBER LOT 327 VERDE LAKES EST.					
	OWNER JERRY & JOAN WILSON					
	BASE BENCHMARK NUMBER RM 14-0 (on floodplain circuit)					
	PROPERTY BENCHMARK ELEVATION					
	DIAGRAM # (from Page 5 & 6 of OMB No. 3067-0070 8					
	Section 2 - Complete if appropriate					
	'As Built' Elevation for Manufactured Homes					
	SURVEYED BOTTOM OF STRUCTURAL FRAME 31603					
	THIS "AS BUILT" SUPERSEDES ONE DATED 8-27-97					
	(seal) AND 13 BEING SENT TO GABY STELMACH (YAVAPAI COUNTY FLOOD CONTROL). Signed					
	COUNTY FLOOD CONTROL), Signed					
	Section 3 - Complete if appropriate					
	'As Built' Elevation for Site Built Homes					
	SURVEYED LOWEST FLOOR ERED LAND SURVEYED LOWEST FLOOR SURVEYED LAND SURVEYED LOWEST FLOOR					
	(seal) DAYION DIGREY DIGREY DIGREY DAYION DIGREY DAYION DAYION					
	FOR DISTRICT USE:					
	REQUIRED ELEVATION TO BOTTOM OF STRUCTURAL FRAME					
	(As Per Development Permit					
	DIFFERENCE					
	REQUIRED LOWEST FLOOR ELEVATION					
	(As Per Development Permit)					
	DIFFERENCE					

F/Elevatn.Frm 7/91

O.M.B. No 3057-0077 Expires May 31, 1993

ELEVATION CERTIFICA.

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a walver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

Value of the second of the sec	PENTINUA BB	ARE 0.00						
SECTION A PROPERTY INFORMATION BUILDING OWNER'S NAME					FOR INSURANCE COMPANY USE			
		JOAN	WILSON		POLICY NUMBER			
STREET ADDRESS (Including Apr 3139 5007 OTHER DESCRIPTION (Lot and	H ASPE	Number) OR P.O. F M WA			COMPANY NAIC NUMBER			
LOT 327 V	ERUE LA	KES E	57. Tax /	eruel 4	04-13-344			
	ERDE			STATE AZ	ZIP CODE			
SECTION 8 FLOOD INSURANCE RATE MAP (FIRM) INFORMATION								
Provide the following from the proper FIRM (See Instructions):								
1. COMMUNITY NUMBER	S. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	A BASE STOOD ST SUATION			
040131	1330		09-20-96	Ala	8. BASE FLOOD ELEVATION (In AO Zones, use depth) 3/59, O			
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) B. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE:								
	SECTIO	ON C BUILDI	NG ELEVATION INFORM	IATION				
1. Using the Elevation Certificate Instructions, Indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 6. 2(a), FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of 1.311601. 3 feet NGVD (or other FIRM datum—see Section B, Item 7). (b), FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of 1.1. Feet NGVD (or other FIRM datum—see Section B, Item 7). (c), FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is 1.1. Feet above 1.2. Feet above 2.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Feet above 2.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Feet above 2.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Feet above 2.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Feet above 2.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Feet above 2.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Firm Zone AO. The floor used as the reference level from the selected diagram is 1.2. Firm Zone AO. The floor used as the reference level from the building and the selected diagram is 1.2. Firm Zone AO. The floor used as the selected diagram is 1.2. Firm Zone AO. The floor used as the selected diagram is 1.2. Firm Zone AO. The floor used as the selected diagram is 1.2. Firm Zone AO. The floor used as the selected diagram is 1.2. Firm Zone AO. The floor used as the selected diagram is 1.2. Firm Zone AO. The floor used as the reference level floor in place, in which 2.2. Firm Zone AO. The floor used as th								
Section B, Item 7).								
SECTION D COMMUNITY INFORMATION								
If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 le not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:								

52064672427242


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, onolocuro size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

DAVID S. DICKEY	SR. 253	84 (ARIZONA)
CERTIFIER'S NAME DWNER - COIZNEIZS	LICENSE NUMBER (n	Affix Seal) E MAPPING
4324 REBEL CIR.	COMPANY NAME	AZ. 86326
ADDRESS Cand I Outre		STATE ZIP
SIGNATURE	DATE	PHONE
Copies should be made of this Certificate for	: 1) community official, 2) insurance ag	ent/company, and 3) building owner.
COMMENTS: 1) THE STRUCT	URE 15 A MANUFA	CTURED HOME,
2) THE VALUE IN SECT	TION C - 2A 15 BE	TTOM OF STRUCTURAL
FRAME.		
3) VALUES FOR SECT	IONS BED WERE	OBTAINED FIZAM
YAVAPAI COUNTY FL	HOD CONTROL OFF	ICE VIA TELEPHONE
4) THIS INFORMATION	15 BEING FURNIS	
COUNTY FLOOD CO	NTROL.	
ON SLAB	MITH	ON PILES, PIERS, OR COLUMNS

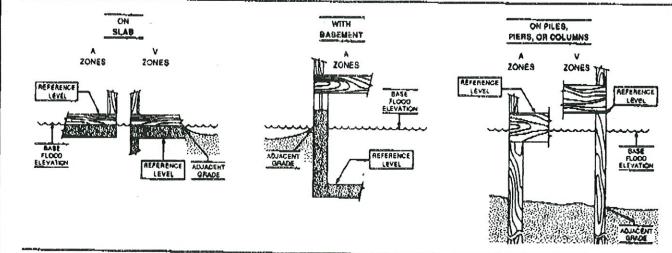

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.