



406-45-012B

FEDERAL EMERGENCY MANAGEMENT AGENCY

NATIONAL FLOOD INSURANCE PROGRAM

ELEVATION CERTIFICATE

AND

INSTRUCTIONS

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077
Expires July 31, 1999

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME <u>Craig Stevens</u>	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER <u>535 Green River Ln</u>	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) <u>Tax Parcel 406-45-012 B</u>	
CITY <u>Cottonwood</u>	STATE <u>AZ</u>
	ZIP CODE <u>86326</u>

SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

Provide the following from the proper FIRM (See Instructions):

1. COMMUNITY NUMBER <u>040093</u>	2. PANEL NUMBER <u>855</u>	3. SUFFIX <u>B</u>	4. DATE OF FIRM INDEX <u>12-19-97</u>	5. FIRM ZONE <u>A12</u>	6. BASE FLOOD ELEVATION (in AO Zones, use depth) <u>3275.7</u>
--------------------------------------	-------------------------------	-----------------------	--	----------------------------	--

7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back)
8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).

SECTION C BUILDING ELEVATION INFORMATION

1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 1.
- 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of 3273.2 feet NGVD (or other FIRM datum—see Section B, Item 7).
- (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of feet NGVD (or other FIRM datum—see Section B, Item 7).
- (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is feet above or below (check one) the highest grade adjacent to the building.
- (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is feet above or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? Yes No Unknown
3. Indicate the elevation datum system used in determining the above reference level elevations: NGVD '29 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.)
4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)
5. The reference level elevation is based on: actual construction construction drawings
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)
6. The elevation of the lowest grade immediately adjacent to the building is: 3272.9 feet NGVD (or other FIRM datum—see Section B, Item 7).

SECTION D COMMUNITY INFORMATION

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: feet NGVD (or other FIRM datum—see Section B, Item 7).
2. Date of the start of construction or substantial improvement (1-1-1977).

INSTRUCTIONS

The following 8 diagrams contain descriptions of various types of buildings. Compare the features of your building with those shown in the diagrams and select the diagram most applicable. Indicate the diagram number on the Elevation Certificate (Section C, Item 1) and complete the Certificate. The reference level floor is that level of the building used for underwriting purposes.

NOTE: In all A Zones, the reference level is the top of the lowest floor; in V Zones the reference level is the bottom of the lowest horizontal structural member (see diagram on page 2). Agents should refer to the Flood Insurance Manual for instruction on lowest floor definition.

DIAGRAM NUMBER 1

ALL SINGLE AND MULTIPLE FLOOR BUILDINGS (OTHER THAN SPLIT LEVEL), INCLUDING MANUFACTURED (MOBILE) HOUSING AND HIGH RISE BUILDINGS, EITHER DETACHED OR ROW TYPE (E.G., TOWNHOUSE, ETC.); WITH OR WITHOUT ATTACHED GARAGE.

Distinguishing Feature - The first floor is *not* below ground level (grade) on *all* sides*. This includes "walkout" basements, where at least one side is at or above grade. (Not illustrated)

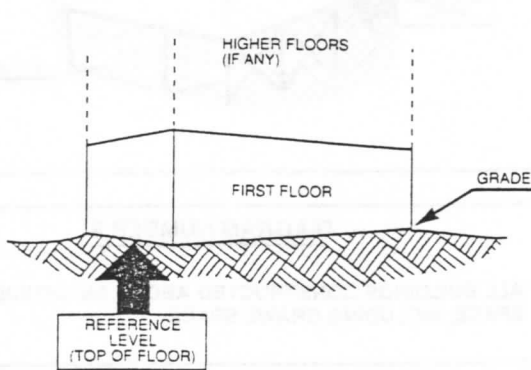


DIAGRAM NUMBER 2

ALL SINGLE AND MULTIPLE FLOOR BUILDINGS (OTHER THAN SPLIT LEVEL), INCLUDING MANUFACTURED (MOBILE) HOUSING AND HIGH RISE BUILDINGS, EITHER DETACHED OR ROW TYPE (E.G., TOWNHOUSES, ETC.); WITH OR WITHOUT ATTACHED GARAGE.

Distinguishing Feature - The first floor *or* basement (including an underground garage*) is below ground level (grade) on *all* sides*.

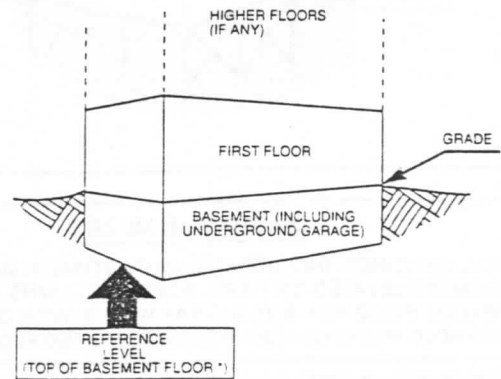


DIAGRAM NUMBER 3

ALL SPLIT LEVEL BUILDINGS, EITHER DETACHED OR ROW TYPE (E.G., TOWNHOUSES, ETC.); WITH OR WITHOUT ATTACHED GARAGE.

Distinguishing Feature - The lower level is *not* below ground level (grade) on *all* sides*. This includes "walkout" basements, where at least one side is at or above grade.


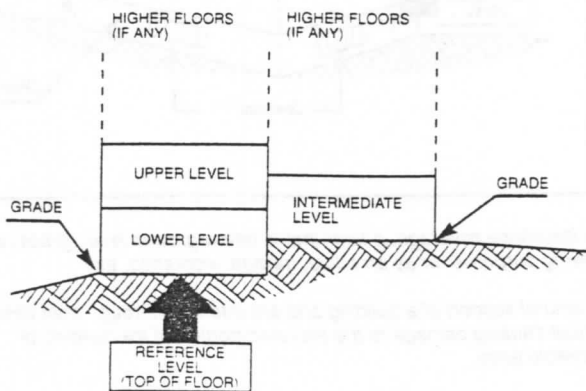


DIAGRAM NUMBER 4

ALL SPLIT LEVEL BUILDINGS, EITHER DETACHED OR ROW TYPE (E.G., TOWNHOUSES, ETC.); WITH OR WITHOUT ATTACHED GARAGE.

Distinguishing Feature - The lower level (*or* intermediate level) is below ground level (grade) on *all* sides*.

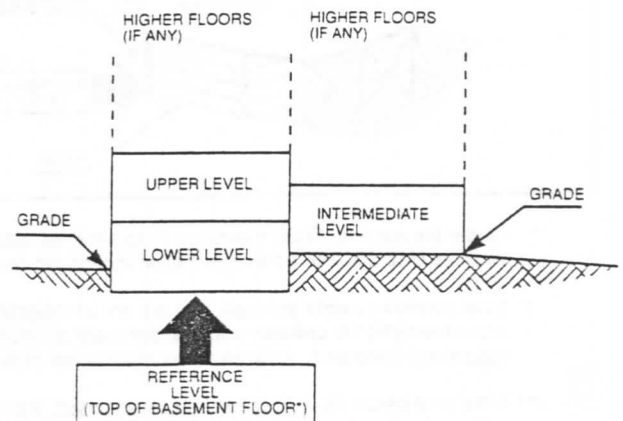

* Under the National Flood Insurance Program's risk classification and insurance coverage, a floor that is below ground level (grade) on all sides is considered a basement even though the floor is used for living purposes, or as an office, garage, workshop, etc.

"AS BUILT" ELEVATIONS FOR EITHER MANUFACTURED HOMES OR SITE BUILT HOMES

When Completed Return To: Yavapai County Flood Control District

Section 1 - Complete entire section

DATE 3-10-1998 ASSESSORS NUMBER 406-45-0128

SUBDIVISION NAME AND LOT NUMBER METES AND BOUNDS

OWNER CRAIG STEVENS

BASE BENCHMARK NUMBER R.M. # 20
(on floodplain circuit)

ELEVATION OF THE LOWEST GRADE
IMMEDIATELY ADJACENT TO THE BUILDING 3272.9

PROPERTY BENCHMARK ELEVATION 3274.43

DIAGRAM # (from Page 5 & 6 of OMB No. 3067-0070) # 1

Section 2 - Complete if appropriate

'As Built' Elevation for Manufactured Homes

SURVEYED BOTTOM OF STRUCTURAL FRAME OR
LOWEST POINT OF ANY ATTACHED APPLIANCES _____

(seal)

Signed _____

Section 3 - Complete if appropriate


'As Built' Elevation for Site Built Homes

SURVEYED LOWEST FLOOR _____

3273.23

(seal)

Signed _____



FOR DISTRICT USE:

REQUIRED ELEVATION TO BOTTOM OF STRUCTURAL FRAME
OR LOWEST POINT OF ANY ATTACHED APPLIANCES _____

(As Per Development Permit)

DIFFERENCE _____

REQUIRED LOWEST FLOOR ELEVATION _____

(As Per Development Permit) G.F. structure

3276.7'

DIFFERENCE _____

- 3.5' (low)