## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	CY NUMBER
Tom Money  STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER  807 N 5 + h St. Situs: 3715 & Comanche	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) Tax Parce 1706-47-198/ Lot 2041 Verde	Village#5
Cotton wood	ZIP CODE Z 80326
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORM.	ATION
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM O 40093 85 819/85 A16	ZONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth)  3250.6
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NG 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7	BHE for this building site, indicate
SECTION C BUILDING ELEVATION INFORMATION	
of BRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural me the selected diagram, is at an elevation of let NGVD (or other FIRM datum—(c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram below (check one) the highest grade adjacent to the building.  (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available, is the building elevated in accordance with the community's floodplain management ordinance?	see Section B, Item 7). is
3. Indicate the elevation datum system used in determining the above reference level elevations under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the equation under Comments on Page 2.)	is unierent man mat used on
4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)	
5. The reference level elevation is based on: A actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference case this certificate will only be valid for the building during the course of construction. A post-col will be required once construction is complete.)	nstruction Elevation Certificate
6. The elevation of the lowest grade immediately adjacent to the building is: 3251. d feet N Section B, Item 7).	NGVD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	WINDER ARE THE EAST OF THE
1. If the community official responsible for verifying building elevations specifies that the reference is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation floor" as defined by the ordinance is:	vation of the building's nowest


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE), V1–V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

LICENSE NUMBER (or Affix Seal)		
COMPANY NAME YAVAPAI COUNTY FLO	YAVAPAI COUNTY FLOOD CONTROL DISTRICT	
PRESCOTT	AZ 86301 ZIP	
8/21/95	PHONE (520) 771-3196	
() community official, 2) insurance age	· /	
	COMPANY NAME YAVAPAI COUNTY FLO CITY PRESCOTT  8/21/95	

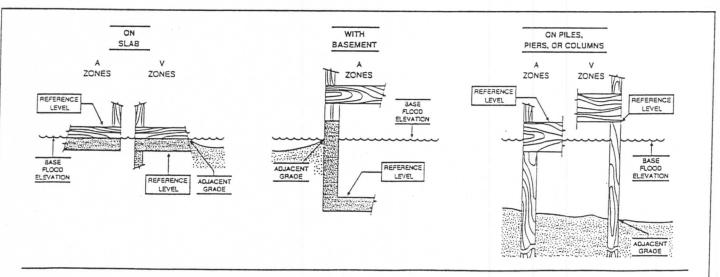

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.