## O.M.B. No 3067-0077 Expires May 31, 1993

## ELEVATION CERTIFICAT

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	P NUMBER
GUS ECKEPT	COMPANY NAIC NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
4314 Comanche Dr	
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	lerdo Villageste
1 Clarity College	ATE ZIP SODE
Cattanwood	2 86326
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORM	ATION
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 2. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM	ZONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth)
0 1000 3	2 3248.6
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NG	VD '29 Other (describe on back)
3. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a	BFE for this building site, indicate
the community's BFE: Life in the Indian life in the	7).
SECTION C BUILDING ELEVATION INFORMATION	
describes the subject building's reference level  2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the of Heat NGVD (or other FIRM datum—see Section B, Item 7).  (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural me the selected diagram, is at an elevation of Heat NGVD (or other FIRM datum—the selected diagram, is at an elevation of Heat NGVD (or other FIRM datum—below (check one) the highest grade adjacent to the building.  (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is Heat one) the highest grade adjacent to the building. If no flood depth number is available, is the belevel) elevated in accordance with the community's floodplain management ordinance? Heat of the elevation datum used in measuring the elevations. Indicate the elevation datum system used in determining the above reference level elevations at the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the equation under Comments on Page 2.)  Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4). The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference case this certificate will only be valid for the building during the course of construction. A post-col	ember of the reference level from see Section B, Item 7). is feet above or  feet above or below (check uilding's lowest floor (reference es No Unknown NGVD '29 Other (describe is different than that used on FIRM and show the conversion
will be required once construction is complete.)  The elevation of the lowest grade immediately adjacent to the building is: 33413.9 feet N	
Section B, Item 7).	
SECTION D COMMUNITY INFORMATION	valve ming Simple in grave
If the community official responsible for verifying building elevations specifies that the reference is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation as defined by the ordinance is:	ation of the building's lowest


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE), V1–V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER	'S NAME KENNETH E. SPEDDING	LICENSE NUMBER (or Affix Seal)		
TITLE	DISTRICT DIRECTOR	YAVAPAI COUNTY FLOOD CONTROL DISTRICT		
ADDRESS	255 E. GURLEY ST.,	PRESCOTT	AZ 86301 ZIP	
SIGNATURE	9/1/	3/8/95	PHONE (602) 771-3196	
Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.				
COMMEN	115:			

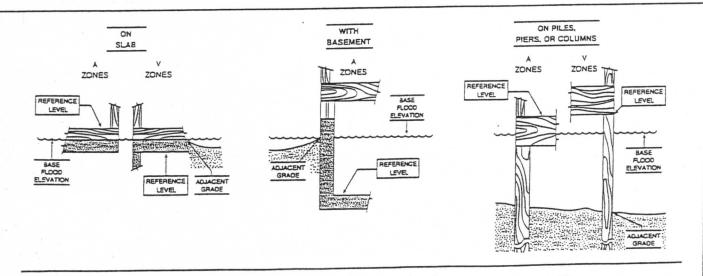

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.