406-58-0544

ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.


SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME Alicia Colvin					POLICY NUMBER
STREET ADDRESS (Including A) 703 N. 4th S	ot., Unit, Suite and/or Bldg.		ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and	Block Numbers, etc.)				
Cottonwood,	AZ 86326			STATE	ZIP CODE
	SECTION B FI	OOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION	
Provide the following from the	ne proper FIRM (See	Instructions):		· · · · · · · · · · · · · · · · · · ·	
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
040096	0001	С	Nov. 19, 1987	X	(In AO Zones, use depth)
3. For Zones A or V, where	no BFE is provided o	n the FIRM, an	ase Flood Elevations (BFE ad the community has esta FIRM datum–see Section	blished a BFE fo	Other (describe on back) or this building site, indicate
	SECTIO	NC BUILDII	NG ELEVATION INFORM	ATION	
(c). FIRM Zone A (without I below (check one) (d). FIRM Zone AO. The flection) the highest grade	s at an elevation of LaFE). The floor used the highest grade adjusted as the refere adjacent to the building dance with the commum system used in de 2). (NOTE: If the elevation on Page 2.) used appears on FIRI on is based on: a law or drawings is only vary be valid for the building ruction is complete.)	as the referent acent to the business level from the series of the business level from the series of	feet NGVD (or other FIRM ce level from the selected ailding. In the selected diagram is depth number is available ain management ordinance above reference level elevel used in measuring the elevel of the datum system used. No (See Instructions on the course of construction. A	datum-see Sed diagram is Land diagram is Land diagram is Land diagram is Land diagram is diagram diagr	ction B, Item 7). defect above or ove er below (check clowest floor (reference No Unknown // D'29 Other (describe cent than that used on and show the conversion
		TION C. CC			
			MMUNITY INFORMATION		
If the community official resis not the "lowest floor" as defined by the ord Date of the start of construction.	defined in the commu inance is:	ınity's floodplai ☑ .	n management ordinance GVD (or other FIRM datum	, the elevation of -see Section B,	the building's "lowest
MA Form 81-31 MAY 00			ALL PREVIOUS EDITIONS	SEE DE	EVERSE SIDE FOR CONTINUATION

BACK PAGE

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

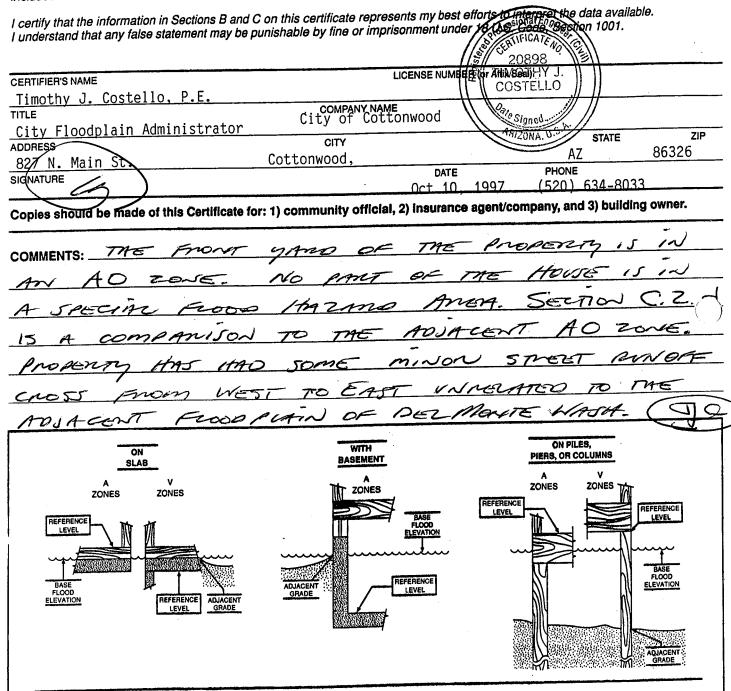

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.